


Features

- All metal housing
- Keypad operation
- Shared use functionality
- Vertical body with or without pull handle
- 3/8" (9.5 mm) solenoid springbolt
- Operates with user selected 4-digit code
- Tamper guard
- Manager bypass functionality
- Visual & audible usage indicators
- Programmable automatic unlock
- Programmable LED indicator
- Powered by 2 premium 9-volt batteries
- 3-5 year battery life
- Low battery and binding indicator
- 2 year product warranty

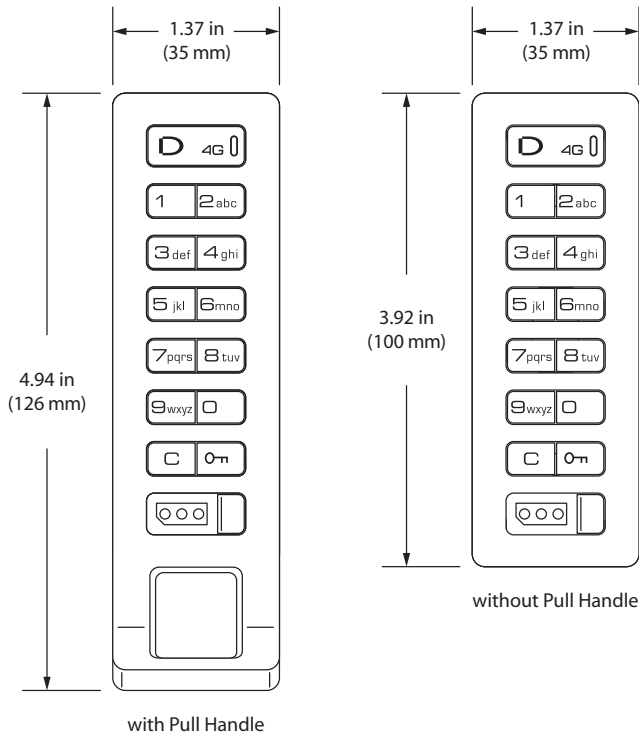



Surface or recess mount
Brushed nickel or custom finishes
Accommodates door thickness of 0.09"-2.368" (2.2 - 60.1 mm)

Programming Key with external power
Manager Bypass Key (up to 25) with external power
Accessibility User Key
Strike plate

Accessories . Options

DAK I - STV I



side view

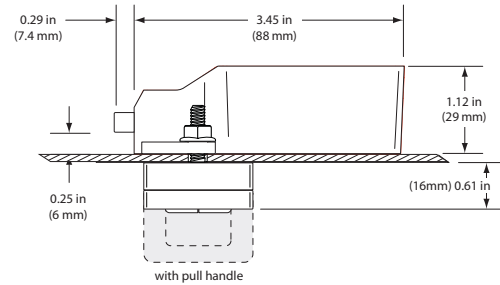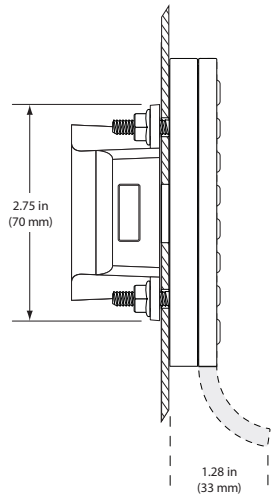

Screw Post
0.01-0.480 in (0.0-12.2 mm) door thickness

top view



side view

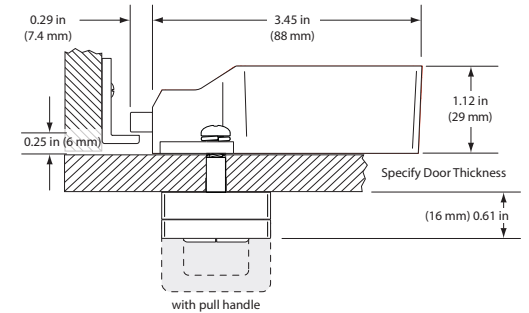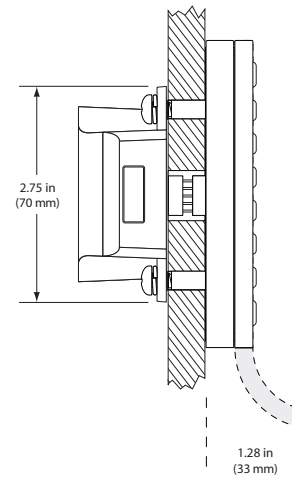

Nut Post
0.480-1.998 in (12.2-50.7 mm) door thickness

top view



side view

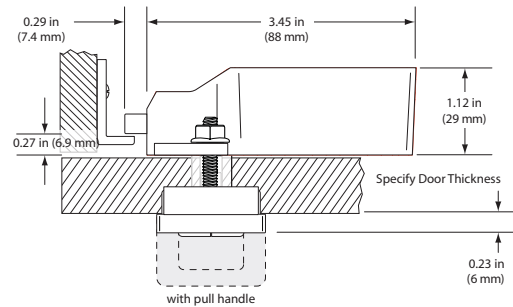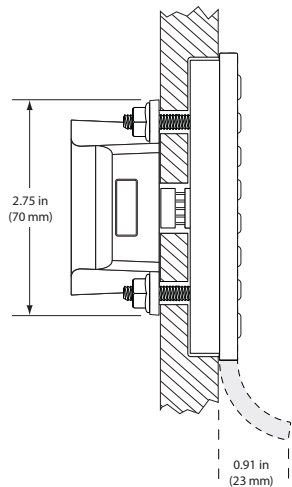

Screw Post
0.370-0.850 in (9.4-21.6 mm) door thickness

top view

side view

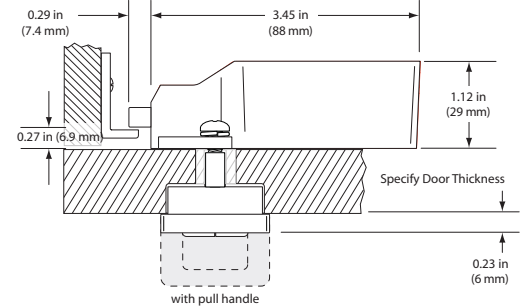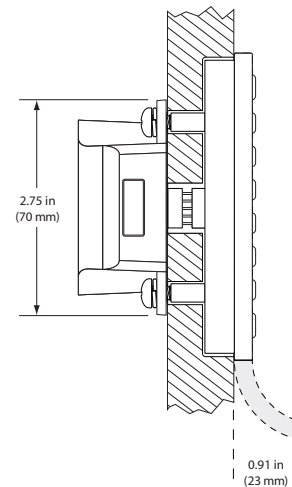

Nut Post
0.850-2.368 in (21.6-60.1 mm) door thickness

top view




Standard Security locks with integrated pull handle operated with an Accessibility User Key are fully compliant with the Americans with Disabilities Act (ADA) guidelines set by the U.S. Access Board. All Digilock models can be operated with an Accessibility User Key to meet compliance guidelines.



Features

- All metal housing
- Keypad operation
- Shared use functionality
- Standard body with or without pull handle
- 3/8" (9.5 mm) solenoid springbolt
- Operates with user selected 4-digit code
- Tamper guard
- Manager bypass functionality
- Visual & audible usage indicators
- Programmable automatic unlock
- Programmable LED indicator
- Powered by 2 premium 9-volt batteries
- 3-5 year battery life
- Low battery and binding indicator
- 2 year product warranty

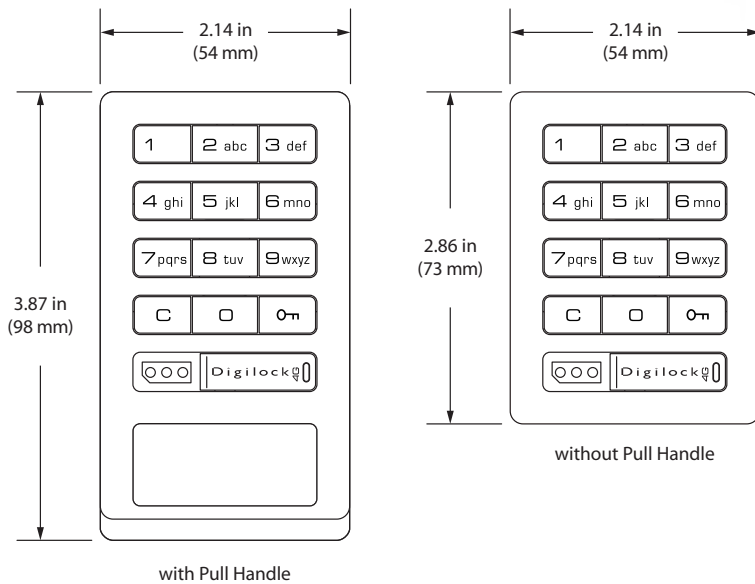



DAK1-STS1

Surface or recess mount
Brushed nickel or custom finishes
Accommodates door thickness of
0.09"-2.368" (2.2 - 60.1 mm)

Programming Key with external power
Manager Bypass Key (up to 25) with
external power
Accessibility User Key
Strike plate

Accessories . Options



side view

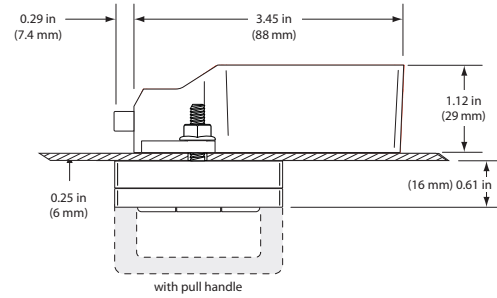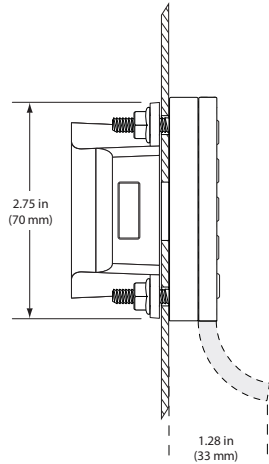

Screw Post
0.01-0.480 in (0.0-12.2 mm) door thickness

top view



side view

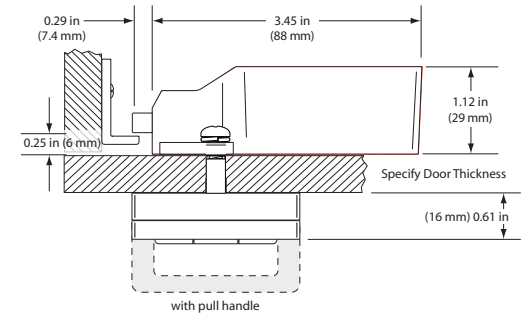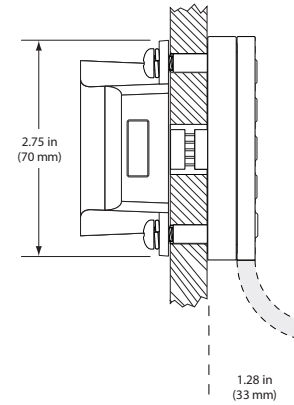

Nut Post
0.480-1.998 in (12.2-50.7 mm) door thickness

top view



side view

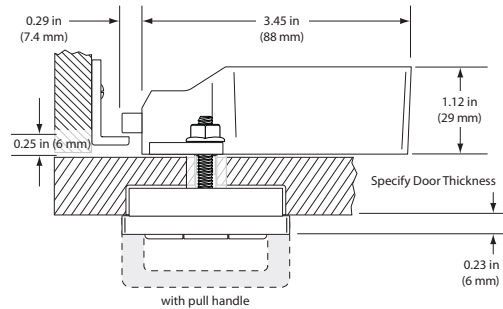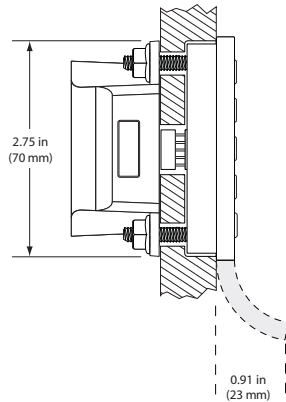

Screw Post
0.370-0.850 in (9.4-21.6 mm) door thickness

top view

side view

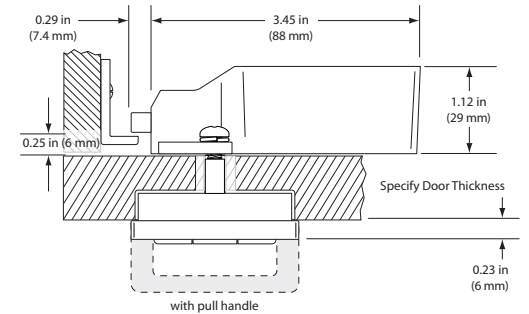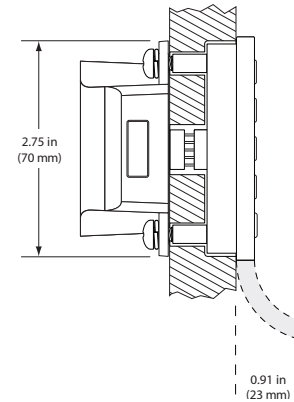

Nut Post
0.850-2.368 in (21.6-60.1 mm) door thickness


top view



Standard Security locks with integrated pull handle operated with an Accessibility User Key are fully compliant with the Americans with Disabilities Act (ADA) guidelines set by the U.S. Access Board. All Digilock models can be operated with an Accessibility User Key to meet compliance guidelines.



- All metal housing
- Keypad operation
- Shared use functionality
- Standard body with or without pull handle
- 1/2" (12 mm) motorized deadbolt
- Operates with user selected 4-digit code
- Tamper guard
- Manager bypass functionality
- Visual & audible usage indicators
- Programmable automatic unlock
- Programmable LED indicator
- Powered by 4 premium AA batteries
- 3-5 year battery life
- Low battery and binding indicator
- 2 year product warranty

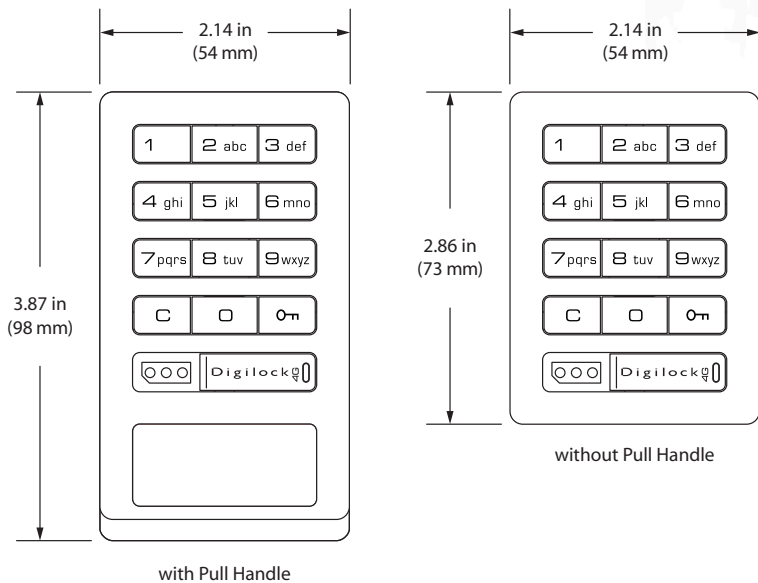



Surface or recess mount
 Brushed nickel or custom finishes
 Accommodates door thickness of
 0.09"-2.00" (2.2 - 50.8 mm)

Programming Key with external power
 Manager Bypass Key (up to 25) with
 external power
 Accessibility User Key
 Strike plate

Accessories . Options

DAKI-ATSI



side view

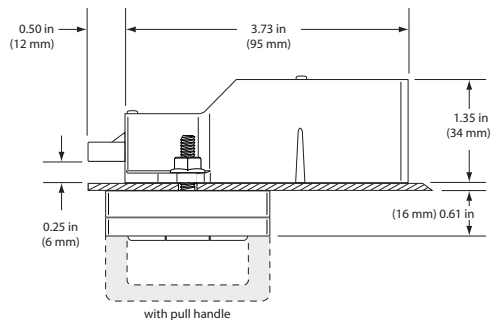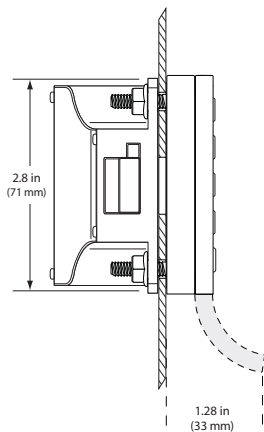

Screw Post
0.01-0.480 in (0.0-12.2 mm) door thickness

top view



side view

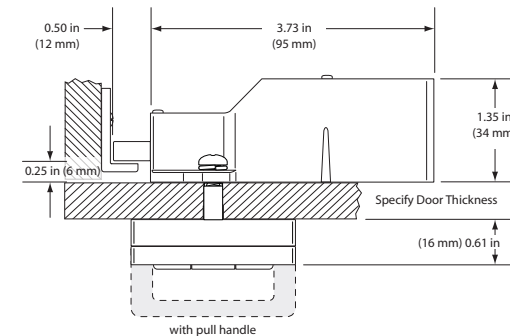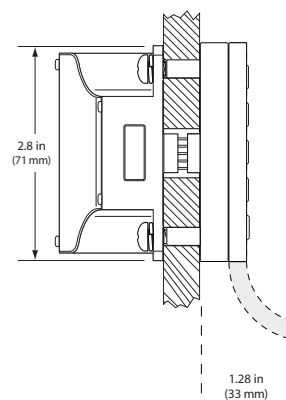

Nut Post
0.480-1.998 in (12.2-50.7 mm) door thickness

top view



side view

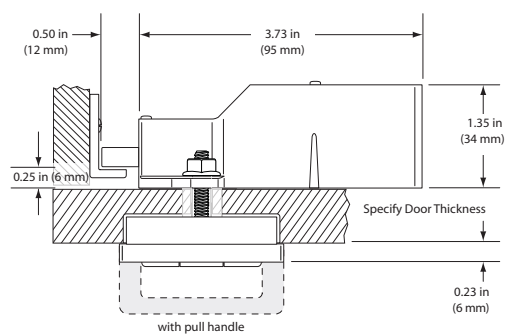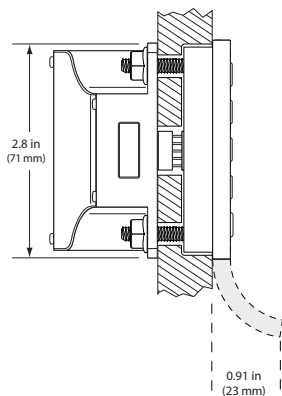

Screw Post
0.370-0.850 in (9.4-21.6 mm) door thickness

top view

side view

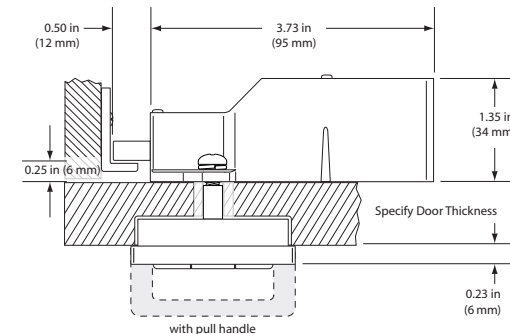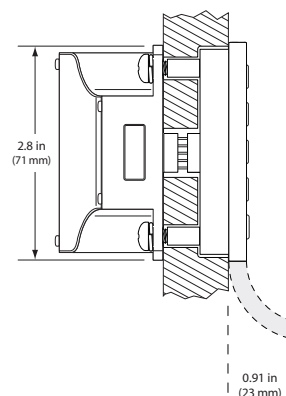

Nut Post
0.850-2.368 in (21.6-60.1 mm) door thickness

top view



Advanced Security locks with integrated pull handle operated with an Accessibility User Key are fully compliant with the Americans with Disabilities Act (ADA) guidelines set by the U.S. Access Board. All Digilock models can be operated with an Accessibility User Key to meet compliance guidelines.

